


**Installation Information**

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8
Celestra	A45	Gray	29

Cat. Nos	Code	Wire Size	Bolt Size	Dimension (in.)					ID	Std. Pkg.
		Flex Class G,H,I,K,M		A	B	C	G	R		
DB041458	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.03	1.28	0.52	0.63	0.75	0.27	100
DB045601	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	2.38	1.63	0.52	1.00	0.75	0.27	100
DB043801	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	2.56	1.81	0.59	1.00	0.75	0.27	100
LB041458	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.24	1.19	0.52	0.63	1.05	0.27	100
LB041434	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.36	1.31	0.56	0.75	1.05	0.27	100
LB041401	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.93	1.88	0.58	1.00	1.05	0.27	100
LB045601	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	2.80	1.75	0.56	1.00	1.05	0.27	100
LB043801	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.03	1.98	0.59	1.00	1.05	0.27	100
LB041243	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.05	3.00	0.88	1.75	1.05	0.27	100
DB041058-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.23	1.17	0.55	0.63	1.06	0.28	100
DB041034-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.35	1.29	0.55	0.75	1.06	0.28	100
DB041458-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.31	1.25	0.55	0.63	1.06	0.28	100
DB041434-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.43	1.37	0.55	0.75	1.06	0.28	100
DB041401-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.68	1.62	0.55	1.00	1.06	0.28	100
DB043801-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	2.90	1.84	0.62	1.00	1.06	0.28	100
DB041458-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	?1/4	2.33	1.27	0.49	0.63	1.06	0.26	100
DB043801-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	2.89	1.83	0.58	1.00	1.06	0.26	100
DB041401-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.70	1.64	0.49	1.00	1.06	0.26	100
DB041243-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	3.89	2.83	0.83	1.75	1.06	0.26	100
DB041434-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.45	1.39	0.49	0.75	1.06	0.26	100
DB045601-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	2.76	1.70	0.52	1.00	1.06	0.26	100
DB041458-251	4 AWG	105/24 #4 Weld	1/4	2.03	1.33	0.55	0.63	0.78	0.28	100
DB041434-251	4 AWG	105/24 #4 Weld	1/4	2.15	1.45	0.55	0.75	0.78	0.28	100
DB041401-251	4 AWG	105/24 #4 Weld	1/4	2.40	1.70	0.55	1.00	0.78	0.28	100
DB041058-261	4 AWG	105/24 #4 Weld	#10	1.90	1.15	0.41	0.63	0.75	0.28	100
DB041001-261	4 AWG	105/24 #4 Weld	#10	2.27	1.52	0.41	1.00	0.75	0.28	100
DB041458-261	4 AWG	105/24 #4 Weld	1/4	2.02	1.27	0.55	0.63	0.75	0.28	100
DB041434-261	4 AWG	105/24 #4 Weld	1/4	2.14	1.39	0.55	0.75	0.75	0.28	100
DB041401-261	4 AWG	105/24 #4 Weld	1/4	2.39	1.64	0.55	1.00	0.75	0.28	100
DB045601-261	4 AWG	105/24 #4 Weld	5/16	2.45	1.70	0.55	1.00	0.75	0.28	100
DB041243-261	4 AWG	105/24 #4 Weld	1/2	3.58	2.83	0.83	1.75	0.75	0.28	100
WP041458-005	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.35	1.15	0.55	0.63	0.76	0.29	100
WP043801-116	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	2.51	1.71	0.55	1.00	0.76	0.29	100
WP041434-117	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.35	1.15	0.55	0.75	0.76	0.29	100
LB041458-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.55	1.25	0.55	0.63	1.30	0.28	100

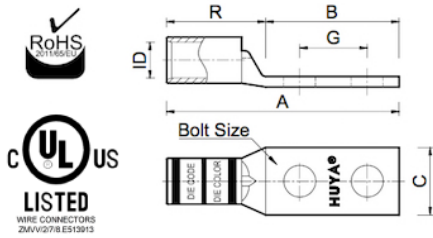

**Installation Information**

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8
Celestra	A45	Gray	29

Cat. Nos	Code	Wire Size	Bolt Size	Dimension (in.)					ID	Std. Pkg.
		Flex Class G,H,I,K,M		A	B	C	G	R		
LB041434-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.67	1.37	0.55	0.75	1.30	0.28	100
LB043801-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.14	1.84	0.62	1.00	1.30	0.28	100
LB041243-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.39	3.01	0.84	1.75	1.30	0.28	100
LB041058P-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.47	1.17	0.55	0.63	1.30	0.28	100
LB041034P-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.59	1.29	0.55	0.75	1.30	0.28	100
LB041458P-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.56	1.26	0.55	0.63	1.30	0.28	100
LB041434P-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.68	1.38	0.55	0.75	1.30	0.28	100
LB041401P-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.92	1.62	0.55	1.00	1.30	0.28	100
LB043801P-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.14	1.84	0.62	1.00	1.30	0.28	100
LB041243P-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.51	3.13	0.75	1.75	1.30	0.28	100
LB041243-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.20	2.83	0.81	1.75	1.37	0.26	100
LB041458-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.64	1.27	0.50	0.63	1.37	0.26	100
LB041434-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.76	1.39	0.50	0.75	1.37	0.26	100
LB043801-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.20	1.83	0.56	1.00	1.37	0.26	100
LB041243P-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.20	2.83	0.83	1.75	1.37	0.26	100
LB041034P-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.64	1.27	0.49	0.75	1.37	0.26	100
LB041458P-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.64	1.27	0.49	0.63	1.37	0.26	100
LB041434P-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.76	1.39	0.49	0.75	1.37	0.26	100
LB043801P-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.20	1.83	0.58	1.00	1.37	0.26	100
LB041458P-251	4 AWG	105/24 #4 Weld	1/4	2.55	1.25	0.55	0.63	1.30	0.28	100
LB041434P-251	4 AWG	105/24 #4 Weld	1/4	2.67	1.37	0.55	0.75	1.30	0.28	100
LB043834P-251	4 AWG	105/24 #4 Weld	3/8	2.89	1.59	0.62	0.75	1.30	0.28	100
LB043801P-251	4 AWG	105/24 #4 Weld	3/8	3.14	1.84	0.62	1.00	1.30	0.28	100
LB043834P-261	4 AWG	105/24 #4 Weld	3/8	3.08	1.58	0.58	0.75	1.50	0.28	100
LB043801P-261	4 AWG	105/24 #4 Weld	3/8	3.33	1.83	0.58	1.00	1.50	0.28	100
LB041458P-261	4 AWG	105/24 #4 Weld	1/4	2.77	1.27	0.55	0.63	1.50	0.28	100
LB041434P-261	4 AWG	105/24 #4 Weld	1/4	2.89	1.39	0.55	0.75	1.50	0.28	100