


Two hole 45°

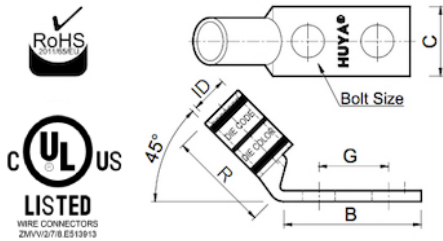


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10
Celestra	A45	Brown	33

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
DB021458F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.28	0.59	0.63	0.85	0.30	100	
DB023801F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.81	0.60	1.00	0.85	0.30	100	
LB021401F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.88	0.67	1.00	1.15	0.30	100	
LB021458F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.28	0.59	0.63	1.15	0.30	100	
LB021434F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.35	0.68	0.75	1.15	0.30	100	
LB025634F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.63	0.59	0.75	1.15	0.30	100	
LB023843F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.57	0.59	1.75	1.15	0.30	100	
LB023801F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.94	0.59	1.00	1.15	0.30	100	
LB021243F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.00	0.88	1.75	1.15	0.30	100	
DB021458F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.63	1.13	0.31	100	
DB021434F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.38	0.60	0.75	1.13	0.31	100	
DB021401F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.63	0.60	1.00	1.13	0.31	100	
DB025634F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.51	0.66	0.75	1.13	0.31	100	
DB023801F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.86	0.66	1.00	1.13	0.31	100	
DB021243F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.01	0.75	1.75	1.13	0.31	100	
DB025634F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.45	0.60	0.75	1.13	0.30	100	
DB021243F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	2.83	0.83	1.75	1.13	0.30	100	
DB021458F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.62	1.13	0.30	100	
DB021401F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.64	0.60	1.00	1.13	0.30	100	
DB021434F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.39	0.60	0.75	1.13	0.30	100	
DB023801F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.60	1.00	1.13	0.30	100	
DB025601F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.70	0.60	1.00	1.13	0.30	100	
DB021458F-251	#2 AWG	150/24 #2 Weld	1/4	1.26	0.70	0.63	0.84	0.36	100	
DB021434F-251	#2 AWG	150/24 #2 Weld	1/4	1.38	0.70	0.75	0.84	0.36	100	
DB021401F-251	#2 AWG	150/24 #2 Weld	1/4	1.63	0.70	1.00	0.84	0.36	100	
DB025601F-251	#2 AWG	150/24 #2 Weld	5/16	1.76	0.70	1.00	0.84	0.36	100	
DB023801F-251	#2 AWG	150/24 #2 Weld	3/8	1.83	0.70	1.00	0.84	0.36	100	
DB021243F-251	#2 AWG	150/24 #2 Weld	1/2	3.01	0.75	1.75	0.84	0.36	100	
DB021458F-261	#2 AWG	150/24 #2 Weld	1/4	1.26	0.68	0.62	0.88	0.36	100	
DB021434F-261	#2 AWG	150/24 #2 Weld	1/4	1.39	0.68	0.75	0.88	0.36	100	
DB021401F-261	#2 AWG	150/24 #2 Weld	1/4	1.64	0.68	1.00	0.88	0.36	100	
DB025601F-261	#2 AWG	150/24 #2 Weld	5/16	1.70	0.68	1.00	0.88	0.36	100	
DB023801F-261	#2 AWG	150/24 #2 Weld	3/8	1.83	0.68	1.00	0.88	0.36	100	
DB021243F-261	#2 AWG	150/24 #2 Weld	?1/2	2.83	0.83	1.75	0.88	0.36	100	
WP023801F-124	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.71	0.59	1.00	0.84	0.30	100	


Two hole 45°

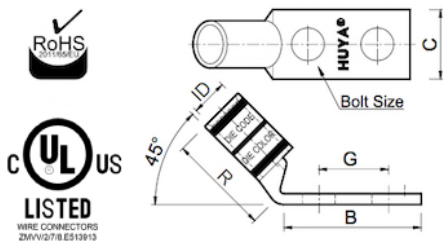

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10
Celestra	A45	Brown	33

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
LB021458F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.63	1.41	0.31	100	
LB021434F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.38	0.60	0.75	1.41	0.31	100	
LB025634F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.51	0.66	0.75	1.41	0.31	100	
LB025678F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.64	0.66	0.88	1.41	0.31	100	
LB023801F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.66	1.00	1.41	0.31	100	
LB023843F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.58	0.66	1.75	1.41	0.31	100	
LB021243F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.01	0.75	1.75	1.41	0.31	100	
LB021058FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	1.17	0.60	0.63	1.41	0.31	100	
LB021034FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	1.29	0.60	0.75	1.41	0.31	100	
LB021458FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.63	1.41	0.31	100	
LB021434FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.38	0.60	0.75	1.41	0.31	100	
LB021401FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.63	0.60	1.00	1.41	0.31	100	
LB025634FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.51	0.66	0.75	1.41	0.31	100	
LB025678FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.64	0.66	0.88	1.41	0.31	100	
LB023834FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.58	0.66	0.75	1.41	0.31	100	
LB023878FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.71	0.66	0.88	1.41	0.31	100	
LB023801FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.66	1.00	1.41	0.31	100	
LB023843FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.58	0.66	1.75	1.41	0.31	100	
LB021243FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.01	0.75	1.75	1.41	0.31	100	
LB021243F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	2.83	0.81	1.75	1.50	0.30	100	
LB021458F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.62	1.50	0.30	100	
LB021434F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.39	0.60	0.75	1.50	0.30	100	
LB023834F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.58	0.60	0.75	1.50	0.30	100	
LB025634F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.45	0.60	0.75	1.50	0.30	100	
LB023843F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.58	0.60	1.75	1.50	0.30	100	
LB023801F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.60	1.00	1.50	0.30	100	
LB023878F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.71	0.60	0.88	1.50	0.30	100	
LB021243FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	?1/2	2.83	0.83	1.75	1.50	0.30	100	
LB021034FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	?#10	1.27	0.60	0.75	1.50	0.30	100	
LB021458FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.62	1.50	0.30	100	
LB021434FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.39	0.60	0.75	1.50	0.30	100	

Two hole 45°

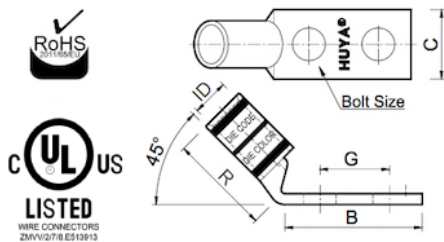

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10
Celestra	A45	Brown	33

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
LB021401FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.64	0.60	1.00	1.50	0.30	100	
LB025634FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.45	0.60	0.75	1.50	0.30	100	
LB023834FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.58	0.60	0.75	1.50	0.30	100	
LB023878FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.71	0.60	7/8	1.50	0.30	100	
LB023801FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.60	1.00	1.50	0.30	100	
LB023843FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.58	0.60	1.75	1.50	0.30	100	
LB021458FP-251	#2 AWG	150/24 #2 Weld	1/4	1.26	0.70	0.63	1.61	0.36	100	
LB021434FP-251	#2 AWG	150/24 #2 Weld	1/4	1.38	0.70	0.75	1.61	0.36	100	
LB023801FP-251	#2 AWG	150/24 #2 Weld	3/8	1.83	0.70	1.00	1.61	0.36	100	
LB021243FP-251	#2 AWG	150/24 #2 Weld	1/2	3.01	0.75	1.75	1.61	0.36	100	
LB021458FP-261	#2 AWG	150/24 #2 Weld	1/4	1.27	0.68	0.63	1.63	0.36	100	
LB021434FP-261	#2 AWG	150/24 #2 Weld	1/4	1.39	0.68	0.75	1.63	0.36	100	
LB023801FP-261	#2 AWG	150/24 #2 Weld	3/8	1.83	0.68	1.00	1.63	0.36	100	
LB021243FP-261	#2 AWG	150/24 #2 Weld	1/2	2.83	0.83	1.75	1.63	0.36	100	