



Two hole 90°

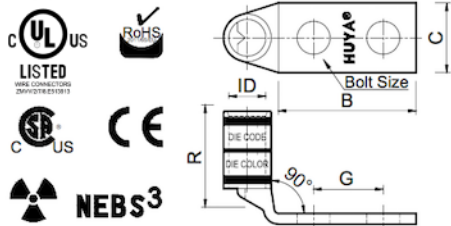

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8
Celestra	A45	Gray	29

Cat. Nos	Code	Wire Size	Dimension (in.)							Std. Pkg.
		Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
DB041458A	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.28	0.52	0.63	0.75	0.27	100	
LB041458A	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.19	0.52	0.63	1.05	0.27	100	
LB041434A	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.31	0.56	0.75	1.05	0.27	100	
LB041401A	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.88	0.58	1.00	1.05	0.27	100	
LB045601A	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	1.75	0.56	1.00	1.05	0.27	100	
LB043801A	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.98	0.59	1.00	1.05	0.27	100	
LB041243A	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	3.00	0.88	1.75	1.05	0.27	100	
DB041058A-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.16	0.55	0.63	1.06	0.28	100	
DB041034A-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.28	0.55	0.75	1.06	0.28	100	
DB041458A-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.25	0.55	0.63	1.06	0.28	100	
DB041434A-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.37	0.55	0.75	1.06	0.28	100	
DB041401A-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.62	0.55	1.00	1.06	0.28	100	
DB043801A-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.84	0.62	1.00	1.06	0.28	100	
DB041458A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.26	0.49	0.62	1.06	0.26	100	
DB043801A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.83	0.58	1.00	1.06	0.26	100	
DB041401A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.64	0.49	1.00	1.06	0.26	100	
DB041243A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	2.83	0.83	1.75	1.06	0.26	100	
DB041434A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.39	0.49	0.75	1.06	0.26	100	
DB045601A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	1.70	0.52	1.00	1.06	0.26	100	
DB041458A-251	4 AWG	105/24 #4 Weld	1/4	1.25	0.55	0.63	0.78	0.28	100	
DB041434A-251	4 AWG	105/24 #4 Weld	1/4	1.37	0.55	0.75	0.78	0.28	100	
DB041401A-251	4 AWG	105/24 #4 Weld	1/4	1.62	0.55	1.00	0.78	0.28	100	
DB045601A-251	4 AWG	105/24 #4 Weld	5/16	1.74	0.55	1.00	0.78	0.28	100	
DB043801A-251	4 AWG	105/24 #4 Weld	3/8	1.84	0.62	1.00	0.78	0.28	100	
DB041058A-261	4 AWG	105/24 #4 Weld	#10	1.15	0.41	0.62	0.75	0.28	100	
DB041001A-261	4 AWG	105/24 #4 Weld	#10	1.52	0.41	1.00	0.75	0.28	100	
DB041458A-261	4 AWG	105/24 #4 Weld	1/4	1.26	0.55	0.62	0.75	0.28	100	
DB041434A-261	4 AWG	105/24 #4 Weld	1/4	1.39	0.55	0.75	0.75	0.28	100	
DB041401A-261	4 AWG	105/24 #4 Weld	1/4	1.64	0.55	1.00	0.75	0.28	100	
DB045601A-261	4 AWG	105/24 #4 Weld	5/16	1.70	0.55	1.00	0.75	0.28	100	
DB043801A-261	4 AWG	105/24 #4 Weld	3/8	1.83	0.58	1.00	0.75	0.28	100	
DB041243A-261	4 AWG	105/24 #4 Weld	1/2	2.83	0.83	1.75	0.75	0.28	100	
LB041458A-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.25	0.55	0.63	1.30	0.28	100	
LB041434A-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.37	0.55	0.75	1.30	0.28	100	
LB043801A-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.84	0.62	1.00	1.30	0.28	100	
LB041058AP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.16	0.55	0.63	1.30	0.28	100	

Two hole 90°

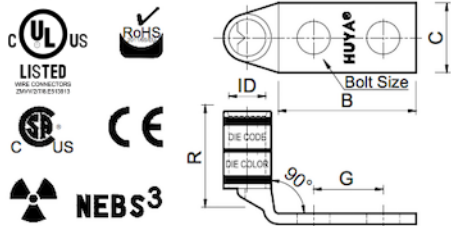

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8
Celestra	A45	Gray	29

Cat. Nos	Code	Wire Size	Dimension (in.)							Std. Pkg.
		Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
LB041034AP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.28	0.55	0.75	1.30	0.28	100	
LB041458AP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.25	0.55	0.63	1.30	0.28	100	
LB041434AP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.37	0.55	0.75	1.30	0.28	100	
LB043801AP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.84	0.62	1.00	1.30	0.28	100	
LB041243A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	2.83	0.81	1.75	1.37	0.26	100	
LB041458A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.26	0.50	0.62	1.37	0.26	100	
LB041434A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.39	0.50	0.75	1.37	0.26	100	
LB043801A-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.83	0.56	1.00	1.37	0.26	100	
LB041243AP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	2.83	0.83	1.75	1.37	0.26	100	
LB041034AP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.27	0.49	0.75	1.37	0.26	100	
LB041458AP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.26	0.49	0.62	1.37	0.26	100	
LB041434AP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.39	0.49	0.75	1.37	0.26	100	
LB043801AP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.83	0.58	1.00	1.37	0.26	100	
LB041458AP-251	4 AWG	105/24 #4 Weld	1/4	1.25	0.55	0.63	1.30	0.28	100	
LB041434AP-251	4 AWG	105/24 #4 Weld	1/4	1.37	0.55	0.75	1.30	0.28	100	
LB043834AP-251	4 AWG	105/24 #4 Weld	3/8	1.55	0.62	0.75	1.30	0.28	100	
LB043801AP-251	4 AWG	105/24 #4 Weld	3/8	1.84	0.62	1.00	1.30	0.28	100	
LB043834AP-261	4 AWG	105/24 #4 Weld	3/8	1.58	0.58	0.75	1.50	0.28	100	
LB043801AP-261	4 AWG	105/24 #4 Weld	3/8	1.83	0.58	1.00	1.50	0.28	100	
LB041458AP-261	4 AWG	105/24 #4 Weld	1/4	1.27	0.55	0.63	1.50	0.28	100	
LB041434AP-261	4 AWG	105/24 #4 Weld	1/4	1.39	0.55	0.75	1.50	0.28	100	