



One - Hole

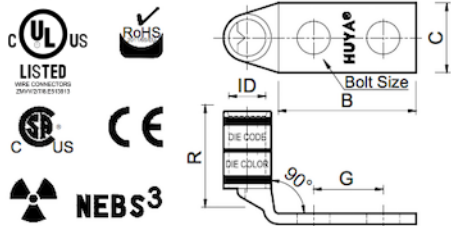

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Cat. Nos	Code	Wire Size	Dimension (in.)							Std. Pkg.
		Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
DB205678A	2/0AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.63	0.83	0.88	1.00	0.44	100	
DB203801A	2/0AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.93	0.83	1.00	1.00	0.44	100	
DB201201A	2/0AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.81	0.83	1.00	1.00	0.44	100	
LB201458A	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.25	0.83	0.63	1.35	0.44	100	
LB201434A	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.31	0.81	0.75	1.35	0.44	100	
LB203801A	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.81	0.83	1.00	1.35	0.44	100	
LB203801AP	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.81	0.83	1.00	1.35	0.44	100	
LB201243A	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.81	0.83	1.75	1.35	0.44	100	
DB201458A-250	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.40	0.85	0.63	1.28	0.45	100	
DB201434A-250	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.53	0.85	0.75	1.28	0.45	100	
DB205678A-250	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.65	0.85	0.88	1.28	0.45	100	
DB203801A-250	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.84	0.85	1.00	1.28	0.45	100	
DB201243A-250	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.00	0.85	1.75	1.28	0.45	100	
DB205678A-260	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.57	0.83	0.88	1.24	0.44	100	
DB201243A-260	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.83	0.83	1.75	1.24	0.44	100	
DB201458A-260	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.26	0.83	0.62	1.24	0.44	100	
DB201401A-260	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.64	0.83	1.00	1.24	0.44	100	
DB201434A-260	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.39	0.83	0.75	1.24	0.44	100	
DB203801A-260	2/0 AWG	125 NavyN 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.83	0.83	1.00	1.24	0.44	100	
DB201458A-251	2/0 AWG	325/24 2/0 Weld	1/4	1.40	0.96	0.62	1.13	0.51	100	
DB201434A-251	2/0 AWG	325/24 2/0 Weld	1/4	1.53	0.96	0.75	1.13	0.51	100	
DB205601A-251	2/0 AWG	325/24 2/0 Weld	5/16	1.78	0.96	1.00	1.13	0.51	100	
DB203801A-251	2/0 AWG	325/24 2/0 Weld	3/8	1.84	0.96	1.00	1.13	0.51	100	
DB201201A-251	2/0 AWG	325/24 2/0 Weld	1/2	2.09	0.96	1.00	1.13	0.51	100	
DB201243A-251	2/0 AWG	325/24 2/0 Weld	1/2	3.00	0.96	1.75	1.13	0.51	100	
DB201458A-261	2/0 AWG	325/24 2/0 Weld	1/4	1.26	0.93	0.62	1.11	0.50	100	
DB201434A-261	2/0 AWG	325/24 2/0 Weld	1/4	1.39	0.93	0.75	1.11	0.50	100	
DB205601A-261	2/0 AWG	325/24 2/0 Weld	5/16	1.70	0.93	1.00	1.11	0.50	100	
DB203801A-261	2/0 AWG	325/24 2/0 Weld	3/8	1.83	0.93	1.00	1.11	0.50	100	
DB201201A-261	2/0 AWG	325/24 2/0 Weld	1/2	2.08	0.93	1.00	1.11	0.50	100	
DB201243A-261	2/0 AWG	325/24 2/0 Weld	1/2	2.83	0.93	1.75	1.11	0.50	100	
LB201458A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.40	0.85	0.63	1.79	0.45	100	
LB201434A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.53	0.85	0.75	1.79	0.45	100	
LB205601A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.78	0.85	1.00	1.79	0.45	100	
LB203801A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.84	0.85	1.00	1.79	0.45	100	

One - Hole

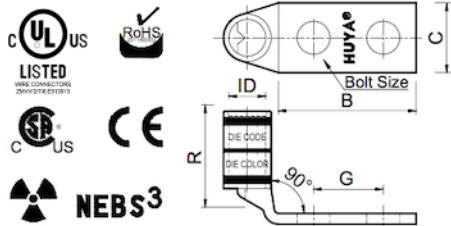

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
LB201201A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.09	0.85	1.00	1.79	0.45	100	
LB201243A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.00	0.85	1.75	1.79	0.45	100	
LB201458AP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.40	0.85	0.63	1.79	0.45	100	
LB201434AP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.53	0.85	0.75	1.79	0.45	100	
LB205601AP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.78	0.85	1.00	1.79	0.45	100	
LB203801AP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.84	0.85	1.00	1.79	0.45	100	
LB201201AP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.09	0.85	1.00	1.79	0.45	100	
LB201243AP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.00	0.85	1.75	1.79	0.45	100	
LB201243A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.83	0.83	1.75	1.80	0.44	100	
LB201458A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.26	0.83	0.62	1.80	0.44	100	
LB201434A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.39	0.83	0.75	1.80	0.44	100	
LB203801A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.83	0.83	1.00	1.80	0.44	100	
LB201243AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.83	0.83	1.75	1.80	0.44	100	
LB201458AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.26	0.83	0.62	1.80	0.44	100	
LB201434AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.39	0.83	0.75	1.80	0.44	100	
LB203801AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.83	0.83	1.00	1.80	0.44	100	
LB201458AP-251	2/0 AWG	325/24 2/0 Weld	1/4	1.40	0.96	0.63	1.80	0.51	100	
LB201434AP-251	2/0 AWG	325/24 2/0 Weld	1/4	1.53	0.96	0.75	1.80	0.51	100	
LB203801AP-251	2/0 AWG	325/24 2/0 Weld	3/8	1.84	0.96	1.00	1.80	0.51	100	
LB201243AP-251	2/0 AWG	325/24 2/0 Weld	1/2	3.00	0.96	1.75	1.80	0.51	100	
LB201458AP-261	2/0 AWG	325/24 2/0 Weld	1/4	1.27	0.93	0.63	1.80	0.50	100	
LB201434AP-261	2/0 AWG	325/24 2/0 Weld	1/4	1.39	0.93	0.75	1.80	0.50	100	
LB203801AP-261	2/0 AWG	325/24 2/0 Weld	3/8	1.83	0.93	1.00	1.80	0.50	100	
LB201243AP-261	2/0 AWG	325/24 2/0 Weld	1/2	2.83	0.93	1.75	1.80	0.50	100	