



COMPRESSION CONNECTORS

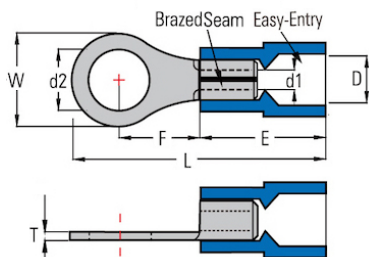

Cat. Nos	Application for Cable Size			Dimension(mm)									Std. Pkg.
	Stud(Metric)	mm ²	A.W.G Stripped Length(mm)	E	L	T	F	W	d1	d2	D		
RN2232	3	0.5-1.5	22-16	7.5-8.0	10.7	18.2	0.75	4.80	5.5	1.7	3.2	3.9	100
RN2237S	3.5	0.5-1.5	22-16	7.5-8.0	10.7	18.2	0.75	4.80	5.5	1.7	3.7	3.9	100
RN2237M	3.5	0.5-1.5	22-16	7.5-8.0	10.7	20.1	0.75	6.30	6.6	1.7	3.7	3.9	100
RN2237L	3.5	0.5-1.5	22-16	7.5-8.0	10.7	21.5	0.75	7.00	8	1.7	3.7	3.9	100
RN2204S	4	0.5-1.5	22-16	7.5-8.0	10.7	20.1	0.75	6.30	6.6	1.7	4.3	3.9	100
RN2204L	4	0.5-1.5	22-16	7.5-8.0	10.7	21.5	0.75	7.00	8	1.7	4.3	3.9	100
RN2205	5	0.5-1.5	22-16	7.5-8.0	10.7	21.5	0.75	7.00	8	1.7	5.3	3.9	100
RN2205L	5	0.5-1.5	22-16	7.5-8.0	10.7	27.4	0.75	11.00	11.8	1.7	5.3	3.9	100
RN2206	6	0.5-1.5	22-16	7.5-8.0	10.7	27.4	0.75	11.00	11.8	1.7	6.4	3.9	100
RN2208	8	0.5-1.5	22-16	7.5-8.0	10.7	27.4	0.75	11.00	11.8	1.7	8.4	3.9	100
RN2210	10	0.5-1.5	22-16	7.5-8.0	10.7	31.2	0.75	13.90	13.6	1.7	10.5	3.9	100
RN1632	3	1.5-2.5	16-14	7.5-8.0	10.7	18.5	0.8	4.70	6.6	2.3	3.2	4.5	100
RN1637S	3.5	1.5-2.5	16-14	7.5-8.0	10.7	18.5	0.8	4.70	6.6	2.3	3.7	4.5	100
RN1637M	3.5	1.5-2.5	16-14	7.5-8.0	10.7	20.2	0.8	6.30	6.6	2.3	3.7	4.5	100
RN1637L	3.5	1.5-2.5	16-14	7.5-8.0	10.7	22.5	0.8	7.40	8.5	2.3	3.7	4.5	100
RN1604S	4	1.5-2.5	16-14	7.5-8.0	10.7	20.2	0.8	6.30	6.6	2.3	4.3	4.5	100
RN1604L	4	1.5-2.5	16-14	7.5-8.0	10.7	22.5	0.8	7.80	8.5	2.3	4.3	4.5	100
RN1605S	5	1.5-2.5	16-14	7.5-8.0	10.7	22.5	0.8	7.80	8.5	2.3	5.3	4.5	100
RN1605L	5	1.5-2.5	16-14	7.5-8.0	10.7	22.7	0.8	7.30	9.6	2.3	5.3	4.5	100
RN1606	6	1.5-2.5	16-14	7.5-8.0	10.7	27.6	0.8	11.00	12	2.3	6.4	4.5	100
RN1608	8	1.5-2.5	16-14	7.5-8.0	10.7	27.6	0.8	11.00	12	2.3	8.4	4.5	100
RN1610	10	1.5-2.5	16-14	7.5-8.0	10.7	31.2	0.8	13.60	13.6	2.3	10.5	4.5	100
RN1237	3.5	4-6	12-10	8.5-9.0	13	22.7	1	6.10	7.2	3.4	3.7	6.4	100
RN1204S	4	4-6	12-10	8.5-9.0	13	22.7	1	6.10	7.2	3.4	4.3	6.4	100
RN1204L	4	4-6	12-10	8.5-9.0	13	26	1	8.30	9.5	3.4	4.3	6.4	100
RN1205	5	4-6	12-10	8.5-9.0	13	26	1	8.30	9.5	3.4	5.3	6.4	100
RN1206	6	4-6	12-10	8.5-9.0	13	29.5	1	10.50	12	3.4	6.4	6.4	100
RN1208	8	4-6	12-10	8.5-9.0	13	34	1	13.50	15	3.4	8.4	6.4	100
RN1210	10	4-6	12-10	8.5-9.0	13	34	1	13.50	15	3.4	10.5	6.4	100
RN1212	12	4-6	12-10	8.5-9.0	13	38.6	1	16.00	19.2	3.4	13	6.4	100
RNB0837	3.5	8	8	11.00	15	28.5	1.2	9.30	8	4.5	3.8	8.4	100
RNB0804S	4	8	8	11.00	15	28.5	1.2	9.30	8	4.5	4.4	8.4	100
RNB0804M	4	8	8	11.00	15	30.8	1.2	10.50	8.8	4.5	4.4	8.4	100
RNB0805S	5	8	8	11.00	15	30.8	1.2	10.50	8.8	4.5	5.4	8.4	100
RNB0804L	4	8	8	11.00	15	30.8	1.2	9.30	12	4.5	4.4	8.4	100
RNB0805M	5	8	8	11.00	15	30.8	1.2	9.30	12	4.5	5.4	8.4	100
RNB0806S	6	8	8	11.00	15	30.8	1.2	9.30	12	4.5	6.6	8.4	100
RNB0805L	5	8	8	11.00	15	36.8	1.2	13.80	15	4.5	5.4	8.4	100
RNB0806L	6	8	8	11.00	15	36.8	1.2	13.80	15	4.5	6.6	8.4	100
RNB0808	8	8	8	11.00	15	36.8	1.2	13.80	15	4.5	8.5	8.4	100
RNB0810	10	8	8	11.00	15	36.8	1.2	13.80	15	4.5	10.6	8.4	100
RNB0604	4	14	6	13.00	21.5	40.8	1.5	13.30	12	5.7	4.4	10.6	100
RNB0605	5	14	6	13.00	21.5	40.8	1.5	13.30	12	5.7	5.4	10.6	100
RNB0606S	6	14	6	13.00	21.5	40.8	1.5	13.30	12	5.7	6.6	10.6	100
RNB0606L	6	14	6	13.00	21.5	43.5	1.5	14.20	16	5.7	6.6	10.6	100
RNB0608	8	14	6	13.00	21.5	43.5	1.5	14.20	16	5.7	8.5	10.6	100
RNB0610	10	14	6	13.00	21.5	43.5	1.5	14.20	16	5.7	10.6	10.6	100
RNB0612	12	14	6	13.00	21.5	52	1.5	19.80	22	5.7	13	10.6	100
RNB0404	4	22	4	14.50	23.5	44.7	1.7	15.10	12.2	7.7	4.4	13.5	100
RNB0405S	5	22	4	14.50	23.5	44.7	1.7	15.10	12.2	7.7	5.4	13.5	100

COMPRESSION CONNECTORS

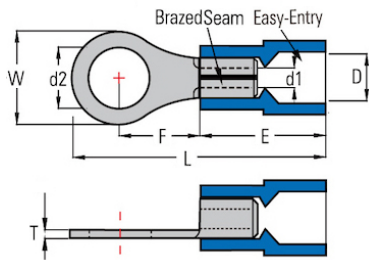

Cat. Nos	Application for Cable Size			Dimension(mm)									Std. Pkg.
	Stud(Metric)	mm ²	A.W.G Stripped Length(mm)	E	L	T	F	W	d1	d2	D		
RNB0406S	6	22	4	14.50	23.5	44.7	1.7	15.10	12.2	7.7	6.6	13.5	100
RNB0405L	5	22	4	14.50	23.5	45	1.7	13.50	16.5	7.7	5.4	13.5	100
RNB0406L	6	22	4	14.50	23.5	33.5	1.7	13.50	16.5	7.7	6.6	13.5	100
RNB0408	8	22	4	14.50	23.5	33.5	1.7	13.50	16.5	7.7	8.5	13.5	100
RNB0410	10	22	4	14.50	23.5	33.5	1.7	13.50	16.5	7.7	10.6	13.5	100
RNB0412	12	22	4	14.50	23.5	54	1.7	19.70	22	7.7	13	13.5	100
RNB0205	5	38	2	14.50	26.5	51.5	1.8	17.40	15.3	9.4	5.4	16.5	100
RNB0206S	6	38	2	14.50	26.5	51.5	1.8	17.40	15.3	9.4	6.6	16.5	100
RNB0208S	8	38	2	14.50	26.5	39	1.8	17.40	15.3	9.4	6.6	16.5	100
RNB0210S	10	38	2	14.50	26.5	39	1.8	17.40	15.3	9.4	10.6	16.5	100
RNB0206L	6	38	2	14.50	26.5	55.2	1.8	17.70	22	9.4	6.6	16.5	100
RNB0208L	8	38	2	14.50	26.5	42.7	1.8	17.70	22	9.4	8.5	16.5	100
RNB0210L	10	38	2	14.50	26.5	42.7	1.8	17.70	22	9.4	10.6	16.5	100
RNB0211	11	38	2	14.50	26.5	42.7	1.8	17.70	22	9.4	11.5	16.5	100
RNB0212	12	38	2	14.50	26.5	42.7	1.8	17.70	22	9.4	13	16.5	100