


COMPRESSION CONNECTORS

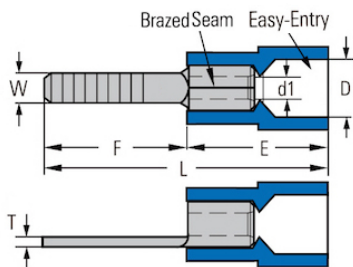

Cat. Nos	Application for Cable Size			Dimension(mm)									Std. Pkg.
	Stud(Metric)	mm <sup>2</sup>	A.W.G Stripped Length(mm)	E	L	T	F	W	d1	d2	D		
BN2209	0.5-1.5	0.5-1.5	22-16	7.5-8.0	10.7	19.5	0.75	9.00	2.8	1.7	2.8	3.9	100
BN2210	0.5-1.5	0.5-1.5	22-16	7.5-8.0	10.7	20.5	0.75	10.00	2.3	1.7	2.3	3.9	100
BN2211	0.5-1.5	0.5-1.5	22-16	7.5-8.0	10.7	21.5	0.75	11.00	3	1.7	3	3.9	100
BN2213	0.5-1.5	0.5-1.5	22-16	7.5-8.0	10.7	23.5	0.75	13.00	2.4	1.7	2.4	3.9	100
BN2214	0.5-1.5	0.5-1.5	22-16	7.5-8.0	10.7	24.5	0.75	14.00	2.4	1.7	2.4	3.9	100
BN2218	0.5-1.5	0.5-1.5	22-16	7.5-8.0	10.7	28.5	0.75	18.00	2.2	1.7	2.2	3.9	100
BN2218S	0.5-1.5	0.5-1.5	22-16	7.5-8.0	10.7	28.5	0.75	18.00	2	1.7	2	3.9	100
BN1609	1.5-2.5	1.5-2.5	16-14	7.5-8.0	10.7	19.5	0.8	9.00	2.8	2.3	2.8	4.5	100
BN1610	1.5-2.5	1.5-2.5	16-14	7.5-8.0	10.7	20.5	0.8	10.00	2.3	2.3	2.3	4.5	100
BN1613	1.5-2.5	1.5-2.5	16-14	7.5-8.0	10.7	23.5	0.8	13.00	2.4	2.3	2.4	4.5	100
BN1614	1.5-2.5	1.5-2.5	16-14	7.5-8.0	10.7	23.5	0.8	13.00	2.4	2.3	2.4	4.5	100
BN1618S	1.5-2.5	1.5-2.5	16-14	7.5-8.0	10.7	28.5	0.8	18.00	2	2.3	2	4.5	100
BN1618	1.5-2.5	1.5-2.5	16-14	7.5-8.0	10.7	28.5	0.8	18.00	2.2	2.3	2.2	4.5	100
BN1210	4-6	4-6	12-10	8.5-9.0	12.7	22.7	1	10.00	2.8	3.4	2.8	6.4	100
BN1214S	4-6	4-6	12-10	8.5-9.0	12.7	26.7	1	14.00	4	3.4	4	6.4	100
BN1214	4-6	4-6	12-10	8.5-9.0	12.7	26.7	1	14.00	4.5	3.4	4.5	6.4	100
BN1218S	4-6	4-6	12-10	8.5-9.0	12.7	30.7	1	18.00	2	3.4	2	6.4	100
BN1218	4-6	4-6	12-10	8.5-9.0	12.7	30.7	1	18.00	4.5	3.4	4.5	6.4	100