


COMPRESSION CONNECTORS

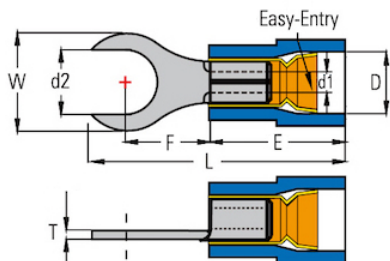

Cat. Nos	Application for Cable Size			Dimension(mm)									Std. Pkg.
	Stud(Metric)	mm ²	A.W.G Stripped Length(mm)	E	L	T	F	W	d1	d2	D		
FND2232	3	0.5-1.5	22-16	7.5-8.0	10.7	17.3	0.75	5.00	5.5	1.7	3.2	4.4	100
FND2237	3.5	0.5-1.5	22-16	7.5-8.0	10.7	19.2	0.75	6.30	6.6	1.7	3.7	4.4	100
FND2204	4	0.5-1.5	22-16	7.5-8.0	10.7	20.5	0.75	7.00	8	1.7	4.3	4.4	100
FND2205	5	0.5-1.5	22-16	7.5-8.0	10.7	20.1	0.75	7.00	8	1.7	5.3	4.4	100
FND2206	6	0.5-1.5	22-16	7.5-8.0	10.7	26	0.75	11.00	11.6	1.7	6.6	4.4	100
FND2208	8	0.5-1.5	22-16	7.5-8.0	10.7	25.1	0.75	11.00	11.6	1.7	8.4	4.4	100
FND2210	10	0.5-1.5	22-16	7.5-8.0	10.7	28.2	0.75	13.70	15	1.7	10.5	4.4	100
FND1632	3	1.5-2.5	16-14	7.5-8.0	10.7	17.7	0.8	4.70	6.6	2.3	3.2	5	100
FND1637	3.5	1.5-2.5	16-14	7.5-8.0	10.7	19.2	0.8	6.30	6.6	2.3	3.7	5	100
FND1604	4	1.5-2.5	16-14	7.5-8.0	10.7	21.6	0.8	7.80	8.5	2.3	4.3	5	100
FND1605	5	1.5-2.5	16-14	7.5-8.0	10.7	21.3	0.8	7.30	9.5	2.3	5.3	5	100
FND1606	6	1.5-2.5	16-14	7.5-8.0	10.7	26.2	0.8	11.00	12	2.3	6.6	5	100
FND1608	8	1.5-2.5	16-14	7.5-8.0	10.7	25.4	0.8	11.00	12	2.3	8.4	5	100
FND1610	10	1.5-2.5	16-14	7.5-8.0	10.7	28.2	0.8	13.70	15	2.3	10.5	5	100
FND1204	4	4-6	12-10	8.5-9.0	12.7	25.9	1	9.10	7.2	3.4	4.3	7	100
FND1205	5	4-6	12-10	8.5-9.0	12.7	25.6	1	9.10	9.5	3.4	5.3	7	100
FND1206	6	4-6	12-10	8.5-9.0	12.7	28.2	1	10.50	12	3.4	6.6	7	100
FND1208	8	4-6	12-10	8.5-9.0	12.7	32.4	1	13.50	15	3.4	8.4	7	100
FND1210	10	4-6	12-10	8.5-9.0	12.7	31.5	1	13.50	15	3.4	10.5	7	100