


COMPRESSION CONNECTORS

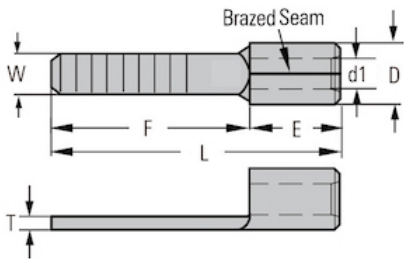

Cat. Nos	Application for Cable Size		Dimension(mm)								Std. Pkg.
	mm <sup>2</sup>	A.W.G Stripped Length(mm)	E	L	T	F	W	d1	D		
B2209	0.5-1.5	22-16	6.00	5	13.8	0.75	9.00	2.8	1.7	3.4	100
B2210	0.5-1.5	22-16	6.00	5	14.8	0.75	10.00	2.3	1.7	3.4	100
B2211	0.5-1.5	22-16	6.00	5	16	0.75	11.00	3	1.7	3.4	100
B2213	0.5-1.5	22-16	6.00	5	17.8	0.75	13.00	2.4	1.7	3.4	100
B2214	0.5-1.5	22-16	6.00	5	18.8	0.75	14.00	2.4	1.7	3.4	100
B2218	0.5-1.5	22-16	6.00	5	22.8	0.75	18.00	2.2	1.7	3.4	100
B2218S	0.5-1.5	22-16	6.00	5	22.8	0.75	18.00	2	1.7	3.4	100
B1609	1.5-2.5	16-14	6.00	5	13.8	0.8	9.00	2.8	2.3	4	100
B1610	1.5-2.5	16-14	6.00	5	14.8	0.8	10.00	2.3	2.3	4	100
B1613	1.5-2.5	16-14	6.00	5	17.8	0.8	13.00	2.4	2.3	4	100
B1614	1.5-2.5	16-14	6.00	5	18.8	0.8	14.00	2.4	2.3	4	100
B1618S	1.5-2.5	16-14	6.00	5	22.8	0.8	18.00	2	2.3	4	100
B1618	1.5-2.5	16-14	6.00	5	22.8	0.8	18.00	2.2	2.3	4	100
B1210	4-6	12-10	7.00	6	16	1	10.00	2.8	3.4	5.5	100
B1214S	4-6	12-10	7.00	6	20	1	14.00	4	3.4	5.5	100
B1214	4-6	12-10	7.00	6	20	1	14.00	4.5	3.4	5.5	100
B1218S	4-6	12-10	7.00	6	24	1	18.00	2	3.4	5.5	100
B1218	4-6	12-10	7.00	6	24	1	18.00	4.5	3.4	5.5	100