



One - Hole

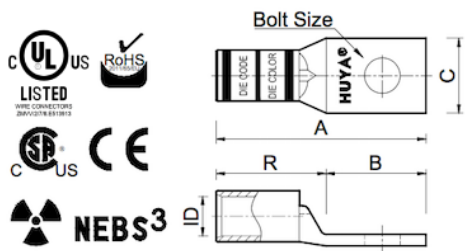

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16
Celestra	A45	Yellow	62

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID		
DA2556-250	250 kcmil	250 Navy 262.6 kcmil	5/16	2.39	0.79	1.13	1.60	0.63	100	
DA2514	250 kcmil	250 Navy 262.6 kcmil	1/4	2.05	0.65	1.13	1.40	0.63	100	
DA2556	250 kcmil	250 Navy 262.6 kcmil	5/16	2.28	0.88	1.13	1.40	0.63	100	
DA2538	250 kcmil	250 Navy 262.6 kcmil	3/8	2.33	0.93	1.13	1.40	0.63	100	
DA2512	250 kcmil	250 Navy 262.6 kcmil	1/2	2.65	1.25	1.13	1.40	0.63	100	
DA2514-250	250 kcmil	250 Navy 262.6 kcmil	1/4	2.38	0.78	1.17	1.60	0.63	100	
DA2538-250	250 kcmil	250 Navy 262.6 kcmil	3/8	2.46	0.86	1.17	1.60	0.63	100	
DA2512-250	250 kcmil	250 Navy 262.6 kcmil	1/2	2.69	1.09	1.17	1.60	0.63	100	
DA2514-260	250 kcmil	250 Navy 262.6 kcmil	1/4	2.05	0.64	1.11	1.41	0.61	100	
DA2538-260	250 kcmil	250 Navy 262.6 kcmil	3/8	2.24	0.83	1.11	1.41	0.61	100	
DA2556-260	250 kcmil	250 Navy 262.6 kcmil	5/16	2.11	0.70	1.11	1.41	0.61	100	
DA2578-260	250 kcmil	250 Navy 262.6 kcmil	7/8	3.18	1.77	1.11	1.41	0.61	100	
DA2512-260	250 kcmil	250 Navy 262.6 kcmil	1/2	2.49	1.08	1.11	1.41	0.61	100	
DA2514-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	1/4	2.16	0.78	1.28	1.38	0.70	100	
DA2556-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/16	2.20	0.82	1.28	1.38	0.70	100	
DA2538-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	2.39	1.01	1.28	1.38	0.70	100	
DA2512-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	1/2	2.50	1.12	1.28	1.38	0.70	100	
DA2558-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/8	2.71	1.33	1.28	1.38	0.70	100	
DA2534-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/4	2.90	1.52	1.28	1.38	0.70	100	
DA2514-252	250 kcmil	250 Navy 262.6 kcmil	1/4	2.16	0.78	1.17	1.38	0.63	100	
DA2556-252	250 kcmil	250 Navy 262.6 kcmil	5/16	2.17	0.79	1.17	1.38	0.63	100	
DA2538-252	250 kcmil	250 Navy 262.6 kcmil	3/8	2.24	0.86	1.17	1.38	0.63	100	
DA2512-252	250 kcmil	250 Navy 262.6 kcmil	1/2	2.47	1.09	1.17	1.38	0.63	100	
DA2556-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/16	2.08	0.70	1.20	1.38	0.65	100	
DA2538-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	2.21	0.83	1.20	1.38	0.65	100	
DA2512-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	1/2	2.46	1.08	1.20	1.38	0.65	100	
DA2558-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/8	2.71	1.33	1.20	1.38	0.65	100	
DA2534-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/4	2.90	1.52	1.20	1.38	0.65	100	
DA2514-261	250 kcmil	250 Flex 637/24 Class I,K,M	3/8	2.05	0.64	1.29	1.41	0.70	100	
DA2556-263	250 kcmil	250 Flex 637/24 Class I,K,M	5/16	2.11	0.70	1.29	1.41	0.70	100	
DA2538-263	250 kcmil	250 Flex 637/24 Class I,K,M	1/2	2.24	0.83	1.29	1.41	0.70	100	
DA2512-263	250 kcmil	250 Flex 637/24 Class I,K,M	1/2	2.49	1.08	1.29	1.41	0.70	100	

One - Hole

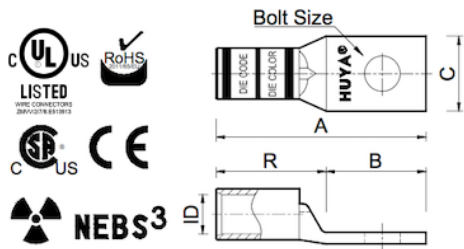

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16
Celestra	A45	Yellow	62

Cat. Nos	Wire Size		Bolt Size	Dimension (in.)				ID	Std. Pkg.
	Code	Flex Class G,H,I,K,M		A	B	C	R		
DA2558-263	250 kcmil	250 Flex 637/24 Class I,K,M	7/8	2.74	1.33	1.29	1.41	0.70	100
DA2534-263	250 kcmil	250 Flex 637/24 Class I,K,M	1/2	2.93	1.52	1.29	1.41	0.70	100
WP2512-024	250 kcmil	250 Navy 262.6 kcmil	3/8	2.50	1.12	1.20	1.38	0.64	100
WP2538-078	250 kcmil	250 Navy 262.6 kcmil	1/2	2.37	0.99	1.20	1.38	0.64	100
WP2556-157	250 kcmil	250 Navy 262.6 kcmil	3/8	2.50	1.12	1.20	1.38	0.64	100
LA2512	250 kcmil	250 Navy 262.6 kcmil	1/2	3.20	1.25	1.13	1.95	0.63	100
LA2512-250	250 kcmil	250 Navy 262.6 kcmil	1/2	3.05	1.09	1.17	1.96	0.63	100
LA2578-250	250 kcmil	250 Navy 262.6 kcmil	1/4	2.05	0.64	1.29	1.96	0.63	100
LA2512-260	250 kcmil	250 Navy 262.6 kcmil	5/16	2.11	0.70	1.29	1.97	0.61	100
LA2538P-260	250 kcmil	250 Navy 262.6 kcmil	3/8	2.24	0.83	1.29	1.97	0.61	100
LA2512P-260	250 kcmil	250 Navy 262.6 kcmil	1/2	2.49	1.08	1.29	1.97	0.61	100
LA2538P-251	250 kcmil	250 kcmil 637/24 Class I,K,M	5/8	2.74	1.33	1.29	2.59	0.70	100
LA2538P-261	250 kcmil	250 kcmil 637/24 Class I,K,M	3/4	2.93	1.52	1.29	2.35	0.65	100
LA2538P-263	250 kcmil	250 kcmil 637/24 Class I,K,M	3/8	3.18	0.83	1.28	2.35	0.70	100