


One - Hole

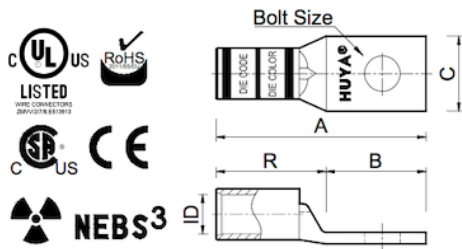

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-920	Red	P71
Burndy	Y35 Y45	Red	18
Celestra	A45	Red	71

Cat. Nos	Wire Size		Bolt Size	Dimension (in.)				ID	Std. Pkg.
	Code	Flex Class G,H,I,K,M		A	B	C	R		
DA3538	350kcmil	350 Navy	3/8	2.80	1.25	1.36	1.55	0.75	100
DA3512	350kcmil	350 Navy	1/2	2.80	1.25	1.36	1.55	0.75	100
DA3558	350kcmil	350 Navy	5/8	3.13	1.58	1.36	1.55	0.75	100
DA3538-250	350kcmil	350 Navy	3/8	2.95	1.01	1.28	1.94	0.70	100
DA3512-250	350kcmil	350 Navy	1/2	3.06	1.12	1.28	1.94	0.70	100
DA3558-250	350kcmil	350 Navy	5/8	3.27	1.33	1.28	1.94	0.70	100
DA3578-250	350kcmil	350 Navy	7/8	3.71	1.77	1.28	1.94	0.70	100
DA3512-260	350kcmil	350 Navy	1/2	2.64	1.08	1.29	1.56	0.70	100
DA3538-260	350kcmil	350 Navy	3/8	2.39	0.83	1.29	1.56	0.70	100
DA3578-260	350kcmil	350 Navy	7/8	3.33	1.77	1.29	1.56	0.70	100
DA3558-260	350kcmil	350 Navy	5/8	2.89	1.33	1.29	1.56	0.70	100
DA3512-241	350kcmil	350 Weld 259/.0368 427/.0285 703/.0224 889/.0201 373.7 kcmil	1/2	3.20	1.25	1.61	1.85	0.79	100
DA3556-251	350kcmil	925/24 350 kcmil	5/16	2.61	0.82	1.54	1.79	0.84	100
DA3538-251	350kcmil	925/24 350 kcmil	3/8	2.80	1.01	1.54	1.79	0.84	100
DA3512-251	350kcmil	925/24 350 kcmil	1/2	2.96	1.17	1.54	1.79	0.84	100
DA3558-251	350kcmil	925/24 350 kcmil	5/8	3.17	1.38	1.54	1.79	0.84	100
DA3556-261	350kcmil	925/24 350 kcmil	5/16	2.47	0.70	1.55	1.77	0.83	100
DA3538-261	350kcmil	925/24 350 kcmil	3/8	2.60	0.83	1.55	1.77	0.83	100
DA3512-261	350kcmil	925/24 350 kcmil	1/2	2.85	1.08	1.55	1.77	0.83	100
DA3558-261	350kcmil	925/24 350 kcmil	5/8	3.10	1.33	1.55	1.77	0.83	100
WP3512-060	350kcmil	350 Navy	1/2	2.83	1.12	1.29	1.56	0.71	100
WP3538-084	350kcmil	350 Navy	3/8	2.68	1.11	1.29	1.56	0.71	100
LA3512	350kcmil	350 Navy	1/2	3.60	1.25	1.36	2.35	0.75	100
LA3512-250	350kcmil	350 Navy	1/2	3.86	1.12	1.28	2.74	0.70	100
LA3578-250	350kcmil	350 Navy	7/8	4.51	1.77	1.28	2.74	0.70	100
LA3512-260	350kcmil	350 Navy	1/2	3.58	1.08	1.29	2.50	0.70	100
LA3538P-260	350kcmil	350 Navy	3/8	3.33	0.83	1.29	2.50	0.70	100
LA3512P-260	350kcmil	350 Navy	1/2	3.58	1.08	1.29	2.50	0.70	100
LA3538P-251	350kcmil	925/24 350 kcmil	3/8	4.01	1.01	1.54	3.00	0.84	100
LA3512P-251	350kcmil	925/24 350 kcmil	1/2	4.17	1.17	1.54	3.00	0.84	100
LA3538P-261	350kcmil	925/24 350 kcmil	3/8	3.58	0.83	1.52	2.75	0.83	100
LA3512P-261	350kcmil	925/24 350 kcmil	1/2	3.83	1.08	1.52	2.75	0.83	100