



One - Hole

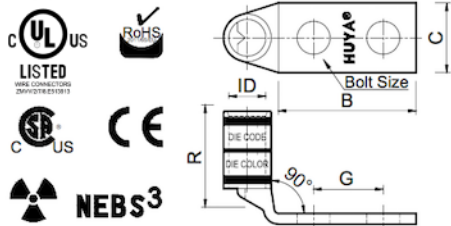

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7
Celestra	A45	Blue	24

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
DB061058A	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.19	0.43	0.63	0.70	0.22	100	
DB061401A	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.50	0.44	1.00	0.70	0.22	100	
DB061458A	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.28	0.44	0.63	0.70	0.22	100	
LB061458A	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.28	0.44	0.63	1.00	0.22	100	
LB061401A	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.63	0.43	1.00	1.00	0.22	100	
LB061434A	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.43	0.43	0.75	1.00	0.22	100	
LB063801A	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.93	0.59	1.00	1.00	0.22	100	
LB061243A	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	3.00	0.88	1.75	1.00	0.22	100	
DB061401A-242	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.56	0.43	1.00	0.70	0.22	100	
DB061058A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.16	0.46	0.63	1.01	0.22	100	
DB061034A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.28	0.46	0.75	1.01	0.22	100	
DB061001A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.53	0.46	1.00	1.01	0.22	100	
DB061458A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	1.01	0.22	100	
DB061434A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	1.01	0.22	100	
DB061401A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	1.01	0.22	100	
DB065601A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.74	0.56	1.00	1.01	0.22	100	
DB063801A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	1.01	0.22	100	
DB061458A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.45	0.62	1.01	0.22	100	
DB061243A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.81	1.75	1.01	0.22	100	
DB061058A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.15	0.42	0.62	1.01	0.22	100	
DB061412A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.14	0.45	0.50	1.01	0.22	100	
DB061401A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.45	1.00	1.01	0.22	100	
DB061434A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.44	0.75	1.01	0.22	100	
DB063801A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.63	1.00	1.01	0.22	100	
DB061012A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.02	0.42	0.50	1.01	0.22	100	
DB065601A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.70	0.52	1.00	1.01	0.22	100	
DB065634A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.45	0.52	0.75	1.01	0.22	100	
DB061058A-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.16	0.46	0.63	0.68	0.22	100	
DB061034A-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.28	0.46	0.75	0.68	0.22	100	
DB061021A-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.03	0.46	1.50	0.68	0.22	100	
DB061069A-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.22	0.46	0.69	0.68	0.22	100	
DB061458A-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	0.68	0.22	100	
DB061434A-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	0.68	0.22	100	
DB061401A-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	0.68	0.22	100	
DB065601A-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.74	0.56	1.00	0.68	0.22	100	
DB063801A-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	0.68	0.22	100	
DB061058A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.15	0.44	0.62	0.70	0.22	100	
DB061034A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.27	0.48	0.75	0.70	0.22	100	
DB061016A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.21	0.44	0.69	0.70	0.22	100	
DB061012A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.02	0.48	0.50	0.70	0.22	100	
DB061458A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.48	0.62	0.70	0.22	100	
DB061434A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.48	0.75	0.70	0.22	100	
DB061401A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.48	1.00	0.70	0.22	100	
DB065601A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.70	0.52	1.00	0.70	0.22	100	
DB063801A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.58	1.00	0.70	0.22	100	
DB061243A-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.83	1.75	0.70	0.22	100	
WP061434A-137	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.56	0.44	0.75	0.65	0.22	100	
LB061058A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.16	0.46	0.63	1.27	0.22	100	
LB061458A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	1.27	0.22	100	
LB061434A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	1.27	0.22	100	

One - Hole

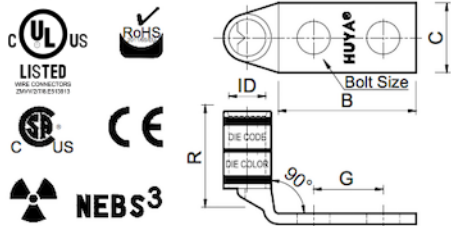

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7
Celestra	A45	Blue	24

Cat. Nos	Code	Wire Size	Dimension (in.)							Std. Pkg.
		Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
LB061401A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	1.27	0.22	100	
LB063801A-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	1.27	0.22	100	
LB061058AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.16	0.46	0.63	1.27	0.22	100	
LB061034AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.28	0.46	0.75	1.27	0.22	100	
LB061412AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.12	0.48	0.50	1.27	0.22	100	
LB061458AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	1.27	0.22	100	
LB061434AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	1.27	0.22	100	
LB061401AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	1.27	0.22	100	
LB061441AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.87	0.48	1.25	1.27	0.22	100	
LB065634AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.49	0.56	0.75	1.27	0.22	100	
LB063834AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.59	0.62	0.75	1.27	0.22	100	
LB063878AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.72	0.62	0.88	1.27	0.22	100	
LB063801AP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	1.27	0.22	100	
LB061243A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.81	1.75	1.32	0.22	100	
LB061458A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.45	0.62	1.32	0.22	100	
LB061401A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.45	1.00	1.32	0.22	100	
LB061434A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.45	0.75	1.32	0.22	100	
LB063801A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.63	1.00	1.32	0.22	100	
LB063834A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.58	0.63	0.75	1.32	0.22	100	
LB063878A-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.71	0.63	0.88	1.32	0.22	100	
LB061243AP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.83	1.75	1.32	0.22	100	
LB061034AP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.27	0.42	0.75	1.32	0.22	100	
LB061458AP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.45	0.62	1.32	0.22	100	
LB061434AP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.45	0.75	1.32	0.22	100	
LB061401AP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.45	1.00	1.32	0.22	100	
LB063834AP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.58	0.58	0.75	1.32	0.22	100	
LB063878AP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.71	0.58	0.88	1.32	0.22	100	
LB063801AP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.58	1.00	1.32	0.22	100	
LB061034AP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.28	0.46	0.75	1.27	0.22	100	
LB061458AP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	1.27	0.22	100	
LB061434AP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	1.27	0.22	100	
LB061401AP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	1.27	0.22	100	
LB063858AP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.47	0.62	0.63	1.27	0.22	100	
LB063878AP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.72	0.62	0.88	1.27	0.22	100	
LB063801AP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	1.27	0.22	100	
LB061034AP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.27	0.48	0.75	0.95	0.22	100	
LB061458AP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.27	0.48	0.63	0.95	0.22	100	
LB061434AP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.48	0.75	0.95	0.22	100	
LB061401AP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.48	1.00	0.95	0.22	100	
LB063801AP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.58	1.00	0.95	0.22	100	
LB063834AP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.58	0.58	0.75	0.95	0.22	100	
LB063878AP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.71	0.58	0.88	0.95	0.22	100	