


COMPRESSION CONNECTORS

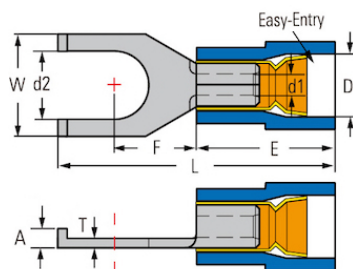

Cat. Nos	Application for Cable Size			Dimension(mm)									Std. Pkg.
	Stud(Metric)	mm ²	A.W.G Stripped Length(mm)	E	L	T	F	W	d1	d2	D		
FSND2202	2	0.5-1.5	22-16	7.5-8.0	10.7	20	1.7	5.10	6.4	1.5	2.2	4.4	100
FSND2232	3	0.5-1.5	22-16	7.5-8.0	10.7	20	1.7	5.10	7.5	1.5	3.2	4.4	100
FSND2232S	3	0.5-1.5	22-16	7.5-8.0	10.7	20	1.7	5.10	6.4	1.5	3.2	4.4	100
FSND2237	3.5	0.5-1.5	22-16	7.5-8.0	10.7	20	1.7	5.10	7.5	1.5	3.7	4.4	100
FSND2237S	3.5	0.5-1.5	22-16	7.5-8.0	10.7	20	1.7	5.10	6.4	1.5	3.7	4.4	100
FSND2237L	3.5	0.5-1.5	22-16	7.5-8.0	10.7	25.5	1.7	7.20	8.5	1.5	3.7	4.4	100
FSND2204	4	0.5-1.5	22-16	7.5-8.0	10.7	20	1.7	5.10	7.5	1.5	4.3	4.4	100
FSND2204L	4	0.5-1.5	22-16	7.5-8.0	10.7	25.5	1.7	7.20	8.5	1.5	4.3	4.4	100
FSND2205	5	0.5-1.5	22-16	7.5-8.0	10.7	20	1.7	5.10	7.5	1.5	5.3	4.4	100
FSND2205L	5	0.5-1.5	22-16	7.5-8.0	10.7	25.5	1.7	7.20	8.5	1.5	5.3	4.4	100
FSND1637	3.5	1.5-2.5	16-14	7.5-8.0	10.7	20.5	2.3	5.20	7.5	1.5	3.7	5	100
FSND1637L	3.5	1.5-2.5	16-14	7.5-8.0	10.7	24	2.3	7.20	8.5	1.5	3.7	5	100
FSND1604	4	1.5-2.5	16-14	7.5-8.0	10.7	20.5	2.3	5.20	7.5	1.5	4.3	5	100
FSND1604M	4	1.5-2.5	16-14	7.5-8.0	10.7	24.5	2.3	6.80	8	1.5	4.3	5	100
FSND1604L	4	1.5-2.5	16-14	7.5-8.0	10.7	24	2.3	7.20	8.5	1.5	4.3	5	100
FSND1605	5	1.5-2.5	16-14	7.5-8.0	10.7	20.5	2.3	5.20	7.5	1.5	5.3	5	100
FSND1605L	5	1.5-2.5	16-14	7.5-8.0	10.7	24	2.3	7.20	8.5	1.5	5.3	5	100
FSND1237	3.5	4-6	12-10	8.5-9.0	12.7	27	3.4	7.50	8.5	1.5	3.7	7	100
FSND1237S	3.5	4-6	12-10	8.5-9.0	12.7	25.5	3.4	6.20	7.6	1.5	3.7	7	100
FSND1204	4	4-6	12-10	8.5-9.0	12.7	27	3.4	7.50	8.5	1.5	4.3	7	100
FSND1204S	4	4-6	12-10	8.5-9.0	12.7	25.5	3.4	6.20	7.6	1.5	4.3	7	100
FSND1205	5	4-6	12-10	8.5-9.0	12.7	27	3.4	7.50	8.5	1.5	5.3	7	100
FSND1205S	5	4-6	12-10	8.5-9.0	12.7	25.5	3.4	6.20	7.6	1.5	5.3	7	100