


COMPRESSION CONNECTORS

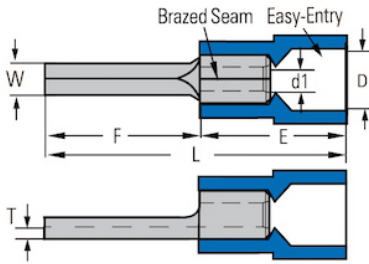

Cat. Nos	Application for Cable Size			Dimension(mm)							Std. Pkg.
	mm ²	A.W.G	Stripped Length(mm)	E	L	T	F	W	d1	D	
DPN2209BS	22-16	0.5-1.5	7.5-8.0	10.7	19.8	0.75	9.00	1.9	1.7	3.9	100
DPN2210BS	22-16	0.5-1.5	7.5-8.0	10.7	20.5	0.75	10.00	1.9	1.7	3.9	100
DPN2212BS	22-16	0.5-1.5	7.5-8.0	10.7	22.5	0.75	12.00	1.9	1.7	3.9	100
DPN1609BS	16-14	1.5-2.5	7.5-8.0	10.7	19.8	0.8	9.00	1.9	2.3	4.5	100
DPN1610BS	16-14	1.5-2.5	7.5-8.0	10.7	20.5	0.8	10.00	1.9	2.3	4.5	100
DPN1612BS	16-14	1.5-2.5	7.5-8.0	10.7	22.5	0.8	12.00	1.9	2.3	4.5	100
DPN1613BS	16-14	1.5-2.5	7.5-8.0	10.7	23.5	0.8	13.00	1.9	2.3	4.5	100
DPN1614BS	16-14	1.5-2.5	7.5-8.0	10.7	24.5	0.8	14.00	1.9	2.3	4.5	100
DPN1615BS	16-14	1.5-2.5	7.5-8.0	10.7	25.5	0.8	15.00	1.9	2.3	4.5	100
DPN1616BS	16-14	1.5-2.5	7.5-8.0	10.7	26.7	0.8	16.00	1.9	2.3	4.5	100
DPN1210BS	12-10	4-6	8.5-9.0	12.7	22.7	1	10.00	2.8	3.4	6.4	100
DPN1212BS	12-10	4-6	8.5-9.0	12.7	24.7	1	12.00	2.8	3.4	6.4	100
DPN1213BS	12-10	4-6	8.5-9.0	12.7	25.7	1	14.00	2.8	3.4	6.4	100
DPN0812BS	8	10	10-10.5	16	30.5	2.4	12.00	4.3	4.5	7.6	100
DPNB0812BS	8	10	10-10.5	16	30.5	2.4	12.00	4.3	4.5	7.6	100
DPN0613BS	6	16	12.5-13	21	36.5	2.6	13.00	5.5	5.8	11	100
DPNB0613BS	6	16	12.5-13	21	36.5	2.6	13.00	5.5	5.8	11	100
DPN0415BS	4	25	16-16.5	25	42.5	2.6	15.00	6.8	7	11.2	100
DPNB0415BS	4	25	16-16.5	25	42.5	2.6	15.00	6.8	7	11.2	100
DPN0220BS	2	35	18.5-19	30.5	54.5	3.2	20.00	8	8.4	14	100
DPNB0220BS	2	35	18.5-19	30.5	54.5	3.2	20.00	8	8.4	14	100