


COMPRESSION CONNECTORS

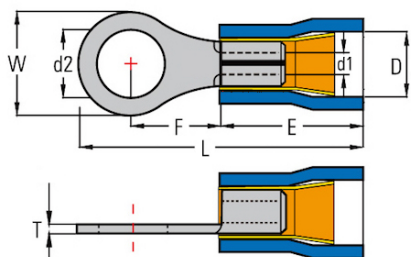

Cat. Nos	Application for Cable Size			Dimension(mm)									Std. Pkg.
	Stud(Metric)	mm ²	A.W.G Stripped Length(mm)	E	L	T	F	W	d1	d2	D		
RD2232SD	3	0.5-1.5	22-16	6.5-7.0	10.5	17.5	0.75	4.80	5.5	1.7	3.2	4.3	100
RD2237SSD	3.5	0.5-1.5	22-16	6.5-7.0	10.5	17.5	0.75	4.80	5.5	1.7	3.7	4.3	100
RD2237MSD	3.5	0.5-1.5	22-16	6.5-7.0	10.5	19.4	0.75	6.30	6.6	1.7	3.7	4.3	100
RD2237LSD	3.5	0.5-1.5	22-16	6.5-7.0	10.5	20.8	0.75	7.00	8	1.7	3.7	4.3	100
RD2204SSD	4	0.5-1.5	22-16	6.5-7.0	10.5	19.4	0.75	6.30	6.6	1.7	4.3	4.3	100
RD2204LSD	4	0.5-1.5	22-16	6.5-7.0	10.5	20.8	0.75	7.00	8	1.7	4.3	4.3	100
RD2205SD	5	0.5-1.5	22-16	6.5-7.0	10.5	20.8	0.75	7.00	8	1.7	5.3	4.3	100
RD2205LSD	5	0.5-1.5	22-16	6.5-7.0	10.5	26.7	0.75	11.00	11.8	1.7	5.3	4.3	100
RD2206SD	6	0.5-1.5	22-16	6.5-7.0	10.5	26.7	0.75	11.00	11.8	1.7	6.4	4.3	100
RD2208SD	8	0.5-1.5	22-16	6.5-7.0	10.5	26.7	0.75	11.00	11.8	1.7	8.4	4.3	100
RD2210SD	10	0.5-1.5	22-16	6.5-7.0	10.5	30.5	0.75	13.90	13.6	1.7	10.5	4.3	100
RD1632SD	3	1.5-2.5	16-14	6.5-7.0	10.5	17.8	0.8	4.70	6.6	2.3	3.2	5	100
RD1637SSD	3.5	1.5-2.5	16-14	6.5-7.0	10.5	17.8	0.8	4.70	6.6	2.3	3.7	5	100
RD1637MSD	3.5	1.5-2.5	16-14	6.5-7.0	10.5	19.5	0.8	6.30	6.6	2.3	3.7	5	100
RD1637LSD	3.5	1.5-2.5	16-14	6.5-7.0	10.5	21.8	0.8	7.40	8.5	2.3	3.7	5	100
RD1604SSD	4	1.5-2.5	16-14	6.5-7.0	10.5	19.5	0.8	6.30	6.6	2.3	4.3	5	100
RD1604LSD	4	1.5-2.5	16-14	6.5-7.0	10.5	21.8	0.8	7.80	8.5	2.3	4.3	5	100
RD1605SSD	5	1.5-2.5	16-14	6.5-7.0	10.5	21.8	0.8	7.80	8.5	2.3	5.3	5	100
RD1605LSD	5	1.5-2.5	16-14	6.5-7.0	10.5	22	0.8	7.30	9.6	2.3	5.3	5	100
RD1606SD	6	1.5-2.5	16-14	6.5-7.0	10.5	23.9	0.8	11.00	12	2.3	6.4	5	100
RD1608SD	8	1.5-2.5	16-14	6.5-7.0	10.5	26.9	0.8	11.00	12	2.3	8.4	5	100
RD1610SD	10	1.5-2.5	16-14	6.5-7.0	10.5	30.5	0.8	13.60	13.6	2.3	10.5	5	100
RD1237SD	3.5	4-6	12-10	7.0-8.0	13	22.7	1	6.10	7.2	3.4	3.7	6.8	100
RD1204SSD	4	4-6	12-10	7.0-8.0	13	22.7	1	6.10	7.2	3.4	4.3	6.8	100
RD1204LSD	4	4-6	12-10	7.0-8.0	13	26	1	8.30	9.5	3.4	4.3	6.8	100
RD1205SD	5	4-6	12-10	7.0-8.0	13	26	1	8.30	9.5	3.4	5.3	6.8	100
RD1206SD	6	4-6	12-10	7.0-8.0	13	29.5	1	10.50	12	3.4	6.4	6.8	100
RD1208SD	8	4-6	12-10	7.0-8.0	13	34	1	13.50	15	3.4	8.4	6.8	100
RD1210SD	10	4-6	12-10	7.0-8.0	13	34	1	13.50	15	3.4	10.5	6.8	100
RD1212SD	12	4-6	12-10	7.0-8.0	13	38.6	1	16.00	19.2	3.4	13	6.8	100