


One - Hole

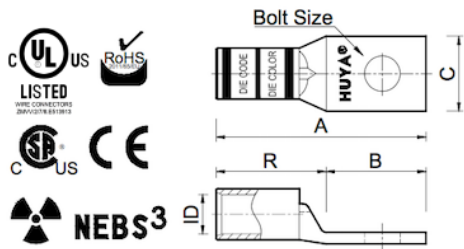

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM8 TBM12	Brown	87
Panduit	CT-720 CT-920	Brown	P87
Burndy	Y35 Y45	Brown	20
Celestra	A45	Brown	87

Cat. Nos	Wire Size		Bolt Size	Dimension (in.)				ID	Std. Pkg.
	Code	Flex Class G,H,I,K,M		A	B	C	R		
DA5138	500kcmil	500 Navy	3/8	3.00	1.00	1.61	2.04	0.88	100
DA5112	500kcmil	500 Navy	1/2	3.25	1.25	1.61	2.04	0.88	100
DA5158	500kcmil	500 Navy	5/8	3.58	1.58	1.61	2.04	0.88	100
DA5112-250	500kcmil	500 Navy	1/2	3.52	1.17	1.54	2.39	0.84	100
DA5158-250	500kcmil	500 Navy	5/8	3.73	1.38	1.54	2.39	0.84	100
DA5134-250	500kcmil	500 Navy	3/4	3.87	1.52	1.54	2.39	0.84	100
DA5178-250	500kcmil	500 Navy	7/8	4.12	1.77	1.54	2.39	0.84	100
DA5101-250	500kcmil	500 Navy	1	4.24	1.89	1.54	2.39	0.84	100
DA5158-260	500kcmil	500 Navy	5/8	3.20	1.33	1.55	1.91	0.84	100
DA5101-260	500kcmil	500 Navy	1	3.81	1.94	1.55	1.91	0.84	100
DA5138-260	500kcmil	500 Navy	3/8	2.70	0.83	1.55	1.91	0.84	100
DA5112-260	500kcmil	500 Navy	1/2	2.95	1.08	1.55	1.91	0.84	100
DA5134-260	500kcmil	500 Navy	3/4	3.39	1.52	1.55	1.91	0.84	100
DA5178-260	500kcmil	500 Navy	7/8	3.64	1.77	1.55	1.91	0.84	100
DA5158-241	500 Weld, 59/.0417	1100/24 = 444 kcmil 500 Weld, 59/.0417 427/.0325,703/.0253	5/8	3.73	1.58	1.75	2.19	0.96	100
DA5156-251	535.3 kcmil 1325/24 500 kcmil	535.3 kcmil 1325/24 500 kcmil	5/16	2.90	0.82	1.89	2.12	1.03	100
DA5138-251	535.3 kcmil 1325/24 500 kcmil	535.3 kcmil 1325/24 500 kcmil	3/8	2.91	0.83	1.89	2.12	1.03	100
DA5112-251	535.3 kcmil 1325/24 500 kcmil	535.3 kcmil 1325/24 500 kcmil	1/2	3.46	1.38	1.89	2.12	1.03	100
DA5158-251	535.3 kcmil 1325/24 500 kcmil	535.3 kcmil 1325/24 500 kcmil	5/8	4.02	1.94	1.89	2.12	1.03	100
DA5112-261	535.3 kcmil 1325/24 500 kcmil	535.3 kcmil 1325/24 500 kcmil	1/2	3.13	1.08	1.84	2.09	0.98	100
DA5158-261	535.3 kcmil 1325/24 500 kcmil	535.3 kcmil 1325/24 500 kcmil	5/8	3.38	1.33	1.84	2.09	0.98	100
DA5156-261	535.3 kcmil 1325/24 500 kcmil	535.3 kcmil 1325/24 500 kcmil	5/16	2.75	0.70	1.84	2.09	0.98	100
DA5138-261	535.3 kcmil 1325/24 500 kcmil	535.3 kcmil 1325/24 500 kcmil	3/8	2.88	0.83	1.84	2.09	0.98	100
WP5112-062	500kcmil	500 Navy	1/2	3.24	1.12	1.55	1.91	0.84	100
LA5112	500kcmil	500 Navy	1/2	4.20	1.25	1.61	2.99	0.88	100
LA5158	500kcmil	500 Navy	5/8	4.53	1.58	1.61	2.99	0.88	100
LA5112-250	500kcmil	500 Navy	1/2	4.27	1.17	1.54	3.14	0.84	100
LA5158-250	500kcmil	500 Navy	5/8	4.48	1.38	1.54	3.14	0.84	100
LA5178-250	500kcmil	500 Navy	7/8	4.87	1.77	1.54	3.14	0.84	100
LA5112-260	500kcmil	500 Navy	1/2	3.93	1.08	1.52	2.89	0.84	100
LA5158-260	500kcmil	500 Navy	5/8	4.18	1.33	1.52	2.89	0.84	100
LA5138P-260	500kcmil	500 Navy	3/8	3.68	0.83	1.55	2.89	0.84	100
LA5112P-260	500kcmil	500 Navy	1/2	3.93	1.08	1.55	2.89	0.84	100